REPOR	RТ	DOCU	MENTAT	ION PAGE		Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.							
1. REPORT DA	ATE		2. REPORT T Paper	YPE	3. DATES COV	ERED	
4. TITLE AND SUBTITLE					5a. CONTRACT NUMBER		
Dynamic In-Flight Antenna Pattern Measurement Techniques					5b. GRANT NUMBER		
					5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)					5d. PROJECT NUMBER		
Rick Hartenstein					5e. TASK NUMBER		
					5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)					8. PERFORMING ORGANIZATION REPORT NUMBER		
Naval Air Warfare Center Aircraft Division 22347 Cedar Point Road, Unit #6 Patuxent River, Maryland 20670-1161							
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)					10. SPONSOR/MONITOR'S ACRONYM(S)		
					11. SPONSOR/I	MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT							
Approved for public release; distribution is unlimited. 13. SUPPLEMENTARY NOTES							
14. ABSTRACT							
NAWCAD Patuxent River, MD, is the Navy's principal air platform flight test and evaluation (T&E) activity. NAWCAD is actively engaged in the Navy's acquisition cycle for all phases of the aircraft system's life cycle, including support of technology demonstration and validation, engineering and manufacturing development (EMD), production and deployment, fleet operations, and fleet in-service engineering. Facilities and capabilities include a principal site for development T&E during EMD, as well as range facilities, flight and ground test support, technical and engineering support, and base support for Navy users, other DoD and government agencies, and commercial enterprises.							
15. SUBJECT TERMS							
16. SECURITY CLASSIFICATION OF:				17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Rick Hartenstein	
a. REPORT	b. <i>A</i>	ABSTRACT	c. THIS PAGE		4	19b. TELEPHONE NUMBER (include area code)	

Standard Form 298 (Rev. 8-98) Prescribed by ANSI Std. Z39-18

Dynamic In-Flight Antenna Pattern Measurement Techniques

Prepared for SS-8/9 – "Electromagnetic Measurements and Associated Processing Techniques"


Mr. R. Hartenstein Naval Air Warfare Center Aircraft Division Patuxent River, MD




The Naval Air Warfare Center Aircraft Division (NAWCAD) Patuxent River, MD, is the Navy's principal air platform flight test and evaluation (T&E) activity. NAWCAD is actively engaged in the Navy's acquisition cycle for all phases of the aircraft system's life cycle, including support of technology demonstration and validation, engineering and manufacturing development (EMD), production and deployment, fleet operations, and fleet in-service engineering.

Facilities and capabilities include a principal site for developmental T&E during EMD, as well as range facilities, flight and ground test support, technical and engineering support, and base support for Navy users, other DoD and government agencies, and commercial enterprises.

NAWCAD Patuxent River operates maintains and approximately 140 project test aircraft, comprising 44 types attack, electronic (fighter, warfare, ASW, trainer, strategic communications, etc.) of both fixed and rotary wing aircraft. The Patuxent River Complex is located about 70 miles south of the Pentagon in Washington, DC, and about 90 air miles




from the fleet in Norfolk, VA. The air station is located on 7,950 acres adjacent to the Chesapeake Bay and 50,000 square miles of airspace for local air operations. The all-weather sea level airfield has three heavy capacity runways 6,400, 9,700, and 11,800 ft long. Over 1,000 buildings, including 10 double-bay hangars provide over 1.2 million square feet of space.





The Communications/Navigation/Identification and Antenna (CNIA) Systems Flight Test Facility provides the capability to conduct development support and test and evaluation on aircraft antennas, antenna installations, secure and non-secure analog and digital communication and data link systems, satellite communications systems, Identification Friend or Foe (IFF) systems, and navigation systems. The facility provides the capability for unobstructed testing in an overwater, smooth ground plane, low EMI test environment. The CNIA Flight Test

Facility houses the Antenna Testing Laboratory Automated System (ATLAS), the Communications Flight Test and Evaluation Laboratory (COMTEL), and the Navy IFF Test and Evaluation Laboratory (NIFFTE). The ATLAS provides dynamic in-flight antenna pattern measurement capability. The COMTEL provides unique airborne communications test capability for HF, VHF, UHF, plain and secure voice, satellite communications (DAMA and non-DAMA), SINCGARS, MIDS, JTIDS, Digital and Have-Quick communications. The NIFFTE provides automated and instrumented interrogator and transponder systems including the AN/APX-76, AN/APX-100, AN/APX-72, and TCAS.

Dynamic in-flight antenna pattern measurement are condcuted using the ATLAS test facility located in Building 1703 at NAWCAD Patuxent River. The ATLAS provides a unique capability to measure the in-flight antenna radiation patterns of airborne antennas to ensure reliable, functional antenna systems are installed in fleet aircraft. The ATLAS facility operates over the 2 MHz to 18 GHz frequency range. The ATLAS provides free-space antenna patterns referenced to isotropic (dBI) and/or Effective Radiated Power (ERP) patterns. The ATLAS facility is versatile and unique.



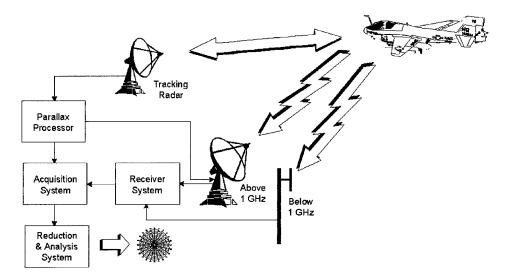





The ATLAS test facility provides the unique capability to measure antenna radiation and ERP patterns of airborne antennas, in-flight, with accuracy normally obtainable only under laboratory conditions. An extensive antenna farm is located adjacent to this facility which omnidirectional and directional contains which antennas have unobstructed electromagnetic propagation paths over the Chesapeake Bay. The ATLAS facility utilizes the Atlantic Test Range Facility for radar

tracking and aircraft controller support. The ATLAS facility utilizes a vertical whip and a horizontal loop for HF frequencies. Standard gain dipole and log-periodic antennas are utilized from 30 MHz to 1 GHz. Above 1 GHz, 10-, 6-, and 2-ft parabolic dish antennas are used.

The ATLAS facility is highly adaptable and flexible. The ATLAS utilizes a variety of calibrated receive antennas, fully programmable receivers, and an automatic calibration system consisting of synthesized signal generators, highly accurate, calibrated power meters and programmable attenuators. The ATLAS system can simultaneously test multiple antennas and/or frequencies.







The ATLAS laboratory is also used as a specification range for aircraft antenna systems and is used for verification of data obtained at other DoD antenna ground ranges and contractor antenna test facilities. The antenna pattern results are used to determine specification compliance, mission suitability, and tactics development for operational users. The ATLAS facility is utilized by Navy, DoD, contractor, and other non-DoD government agencies.

The ATLAS facility's capability to measure free-space inflight antenna patterns and reference them to an isotropic source is unique. The location of the ATLAS facility on the Chesapeake Bay provides a calm body of water to serve as a reflection surface for RF energy. The calmness of the Bay characterization of the accurate reflecting electromagnetic energy. The multipath interference can be calculated based on the height of the aircraft, the height of the receive antenna, the frequency, range and polarization. The mathematical equations are developed and presented in the January 1984 issue of the IEEE Transactions on Antennas and Propagations. As a result, the measured antenna pattern can be corrected for multipath effects, to obtain true free-space antenna and ERP patterns.









The location of the ATLAS facility also has the advantage of being conveniently located next to restricted airspaces. This allows the aircraft to operate in a positive-controlled environment while Patuxent Advisory provides the aircraw with traffic calls of adjacent aircraft.

The ATLAS started out in the 1950's using radio receivers, stripcharts and measuring tedious 24-point cloverleaf flight profiles. The facility has been continually updated with state-of-the-art test equipment and now utilizes a VME-based computer system which can take over 1,000 data samples-persecond on 10 channels simultaneously. Polar azimuth antenna patterns plots are the standard output format, but data is also available in rectangular and digital formats.





Recent antenna evaluations include: the KC-130, VP-3, and C-2 TCAS, the F/A-18E/F CNI, the E-2C SATCOM, the SH-60R CNI, the F-14D GPS, the V-22 CNI, the P-3C SATCOM, the E-2C ROTODOME, the CH-53D/CH-46E GPS, the EA-6B ALQ-99 JAMMER, the US ARMY APACHE HF, the USCG HH-60J COMM, the USAF C-130 JTIDS, and the FAA KING-AIR GPS antenna evaluations.





For additional information, contact:

Communications and Antennas Branch Naval Air Warfare Center Aircraft Division 22565 Cedar Point Road, Bldg 1703 Patuxent River, MD 20670-1185

Points of Contact:

John Bauserman, Branch Head, 301.342.7592 Rick Hartenstein, Project Engineer, 301.342.4103 Matt Hartley, Project Engineer, 301.342.4104 FAX 301.342.3195, DSN 342.XXXX